

★ *innovation* ★


SENSO
SELF-ADHESIVE

PREMIUM





SIMPLY THE BEST FOR YOUR FLOOR



Reinforced structure



No gap



Reinforced adhesive



Resistant



No dilatation



Easy cleaning

0910 - BALADE LIGHT



0909 - BALADE HONEY



0919 - PROVENCE GREY

1-BALADE HONEY

Size: 121.9 x 18.4 cm

Code: 3579 0909 - EAN: 3475710431401

2-BALADE GREY

Size: 121.9 x 18.4 cm

Code: 3579 0910 - EAN: 3475710431418

3-BALADE LIGHT

Size: 121.9 x 18.4 cm

Code: 3579 0912 - EAN: 3475710431425

4-SIMBA

Size: 121.9 x 18.4 cm

Code: 3579 0287 - EAN: 3475710428913

5-ROMANCE PEARL

Size: 121.9 x 18.4 cm

Code: 3579 0901 - EAN: 3475710428890

6-ROMANCE TAUPE

Size: 121.9 x 18.4 cm

Code: 3579 0903 - EAN: 3475710428906

7-PEPPER LIGHT

Size: 61 x 61 cm

Code: 3578 0890 - EAN: 3475710428876

8-SUGAR CLEAR

Size: 61 x 61 cm

Code: 3578 0918 - EAN: 3475710431449

9-PEPPER TAUPE

Size: 61 x 61 cm

Code: 3578 0889 - EAN: 3475710428869

10-SUGAR

Size: 61 x 61 cm

Code: 3578 0900 - EAN: 3475710428883

11-PROVENCE GOLD


Size: 61 x 61 cm

Code: 3578 0920 - EAN: 3475710431463

12-PROVENCE GREY

Size: 61 x 61 cm


Code: 3578 0919 - EAN: 3475710431456



7



8

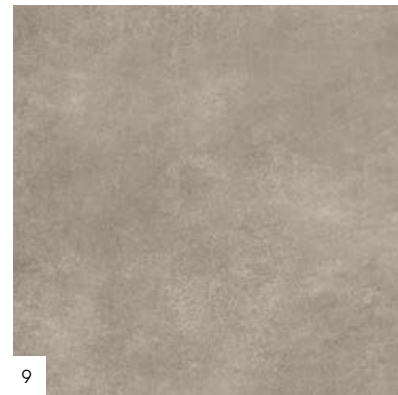

9



10



11

Registered cutting



12

Registered cutting

SENSO SELF-ADHESIVE PREMIUM



TECHNICAL CHARACTERISTICS

DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.50
Thickness of wearlayer	EN ISO 24340 (EN 429)	mm	0.30
Weight: Mass per unit area	EN ISO 23997 (EN 430)	g/sqm	4660
Size	EN ISO 24342 (EN 427)	cm	planks: 121.9 x 18.4 tiles: 61 x 61
Planks / Tiles per package	-	planks / tiles	planks: 11 tiles: 7
Surface per package	-	sqm	planks: 2.47 tiles: 2.60
CLASSIFICATION			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874 (EN 685)	class	23/31
Fire rating - Classification	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
PERFORMANCE			
Wear Resistance	EN 660.2	mm ³	< 2.0
Wear Group	EN 649	group	T
Type binder content	ISO 10582	type	I
Dimensional stability after exposure to heat	EN ISO 23999 (EN 434)	%	≤ 0.10
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Sound insulation	EN ISO 717-2	dB	5
Room impact noise	NF S 31074	dB	77
Thermal conductivity	EN ISO 10456 (EN 12524)	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Guarantee for residential use	-	year	15
Environment / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
CE MARKING			
	EN 14041	   	


Areas of use: domestic use



SENSO SELF-ADHESIVE PREMIUM

LAYING


1 important

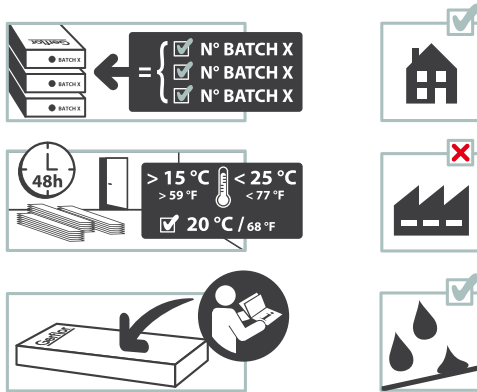


2 preparation



3 installation

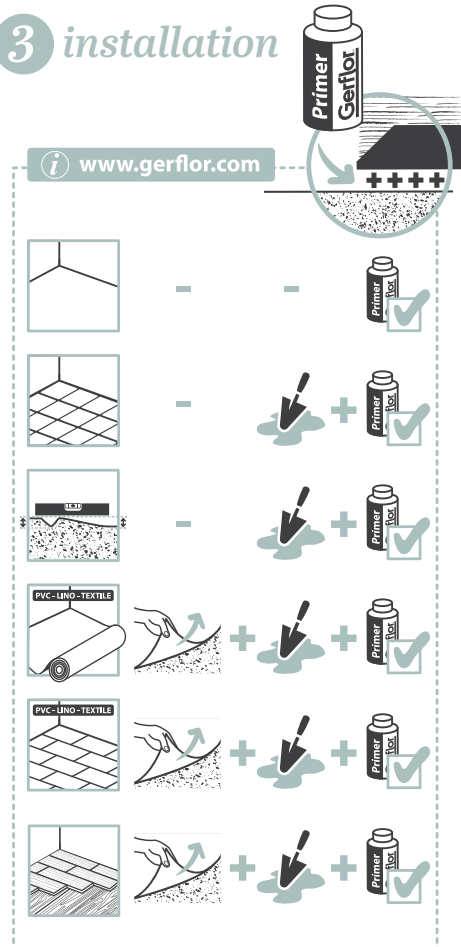

4 maintenance

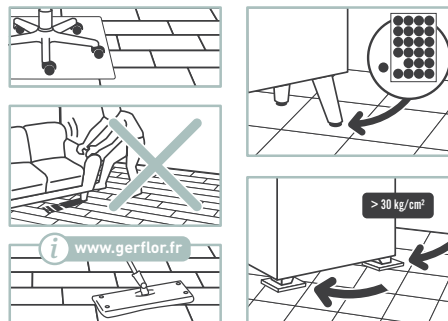

HEALTH

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

