

home 30

gluedown

plank: 1219 × 184 mm – box: 15 planks (=3,364 m²) – Pallet: 95 boxes (=319,62 m²)

tile: 914,4 × 609,6 mm – box: 9 (=5,017 m²) – Pallet: 56 boxes (=280,94 m²)

click


plank: 1210 × 176,6 mm – box: 12 planks (=2,564 m²) – Pallet: 65 boxes (=166,68 m²)

product specifications.

		gluedown 30 plank	gluedown 30 tile	click 30
Total thickness	EN ISO 24346	2 mm	2 mm	3,4 mm
Thickness of the wear layer	EN ISO 24340	0,3 mm	0,3 mm	0,3 mm
Total weight	EN ISO 23997	3,445 kg/m ²	4 kg/m ²	6,6 kg/m ²
Usage classification	EN ISO 10874	23/31	23/31	23/31

test results.

Underfloor heating	EN ISO 12524	suitable – max. 27°C (80°F)/electrical floor heating systems: max 60 W/m ²		
Castor chair	EN ISO 4918	pass	pass	pass
Fire resistance	EN ISO 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
Chemical resistance Light fastness	EN ISO 26987	OK	OK	OK
Light fastness	EN ISO 105-B02	> 6	> 6	> 6
Thermal resistance	EN 8302	0,01 m ² K/W	0,01 m ² K/W	0,011 m ² K/W
Residual indentation	EN ISO 24343-1	<0,1mm	<0,1mm	<0,1mm
Slip resistance	DIN 51130	R10	R10	R10
	EN ISO 13893	class DS	class DS	class DS
Sound reduction: impact sound	EN ISO 717-2	2 dB	2 dB	3 dB
Reflected walking sound	EPLF draft 021029-3-2004	xxx	xxx	39 SONE (49% sound reduction)
Dimensional stability	EN ISO 23999	< 0,15 %	< 0,15 %	< 0,15 %
Residential warranty		15 y	15 y	15 y
Formaldehyde	EN ISO 717-1	E1	E1	E1
Lock strength	EN ISO 10582	\	\	> 3 kN/m



SPiRiT HOME 30
GLUEDOWN




SPiRiT HOME 30
CLICK



home 30

spirit.


spirit. HOME 30 click

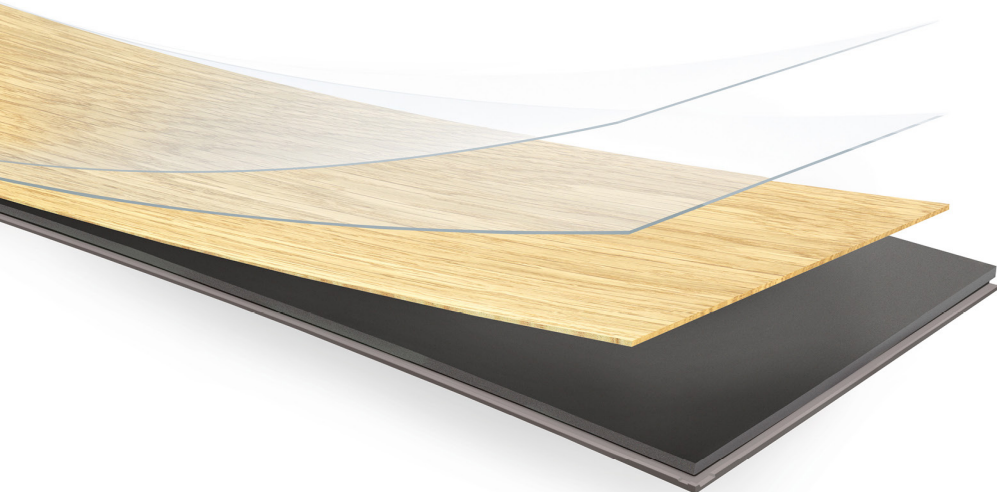

- 1 Protective PU lacquer
- 2 Wear layer 0.3 mm
- 3 Decorative printfilm
- 4 Rigid board

Total thickness: 3.4 mm

spirit. HOME 30 gluedown

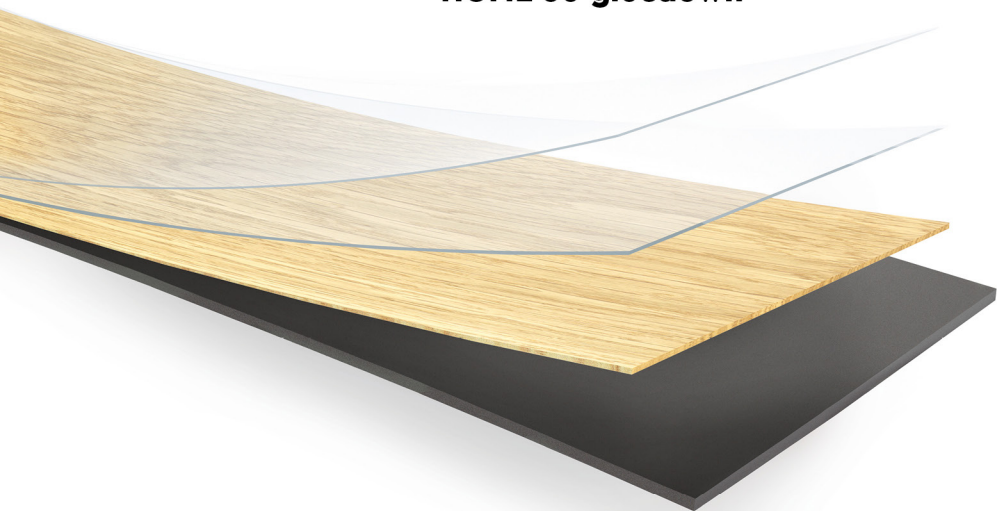

- 1 Protective PU lacquer
- 2 Wear layer 0.3 mm
- 3 Decorative printfilm
- 4 PVC backing layer

Total thickness: 2 mm